



VTZ VALVES AND AUTOMATION

(An ISO 9001:2015 Certified Company)



VTZ VALVES AND AUTOMATION

Manufacturer of all kinds of Industrial Valves



VTZ VALVES AND
AUTOMATION

CENTRIC WAFLER BODY BUTTERFLY VALVE



TECHNICAL SPECIFICATION

Design & Manufacturing Standards

API 609 / BS EN-593 / IS13095 / ASME B16.5 / ISO 7005

Testing Standard

API 598 / API6D / BSEN 12266-1

Valve face to face Dimension

Category A API 609 / IS13095 / EN593 / ISO5752Tab5

TOP Flange Drilling

ISO 5211

Flang Standard

DIN EN 1092-PN6, PN10, Class 150, BS10
Tab D&E, IS6392, Tab 11/17, JIS 5K/10K

MATERIAL OF CONSTRUCTION

BODY

Cast Iron ASTM A126 Class B IS 210 FG 260,
Ductile Iron ASTM A 395 (60-40-18), WCB (CS)
ASTM A 216, Stainless Steel (CF8M/CF8) ASTM A 351M/351

DISC

Cast Iron ASTM A126 Class B IS 210 FG 260, Ductile Iron
ASTM A 395 (60-40-18), WCB (CS) ASTM A 216,
Stainless Steel (CF8M/CF8) ASTM A 351M/351
Alluminium Bronze, Duplex, Super Duplex

***DISC also available with Rubber Lining in EBBONITE/
EPDM/NBR/NYLON/HYPLON (with Gurranted Spark
Test Pass)**

SEAT

EPDM / White EPDM (FOOD GRADE)
BUNA-N / White - BUNA N (Food Garde)
(NITRILE - NBR) VITON, HYPLON, BUTYLE, SILICON,
NEOPRENE, NATURAL RUBBER, **PTFE**.

STEM

Stainless Steel ASTM A 479 TYPE 410
Stainless Steel ASTM A 276 TYPE 316
Stainless Steel ASTM A 276 TYPE 304
Duplex, Super Duplex, Monel, Bronze

STEM BUSHING : PTFE, ACETAL

OIL SEAL (Stem Seal) : EPDM

WASHER : SS304


RETAINING CIRCLIP : SPRING STEEL

Note : Note : All Body and Disc are **IC** Cast from
1.5" (**DN40**) To 24" (**DN600**) Available. any other
Special Material are also work on request for
Body / Disc / Stem / Seat.



VTZ VALVES AND AUTOMATION

DIMENSION SPECIFICATION

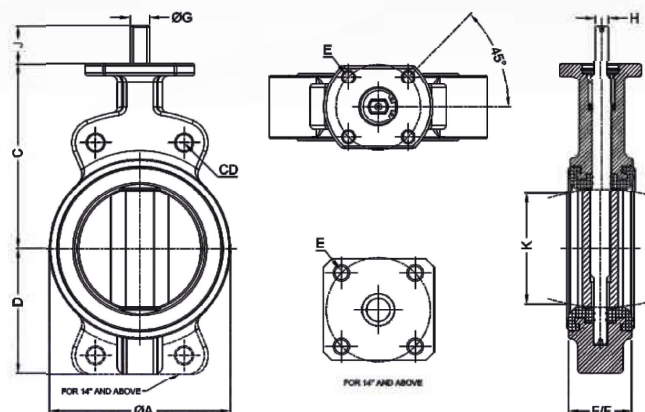

Valve Size		ØA	F/F	C	D	Top Mounting Flange			ØG	H	J	K	Bolting Dia	
Inch	DIN					E	No. of Holes	Hole Dia					ASME B16.5 CD	ISD 7005 CD
1.5	40	71.80	43.00	87.00	47.00	F05	4	8.00	12.00	8.00	30.00	—	98.40	110.00
2	50	91.00	43.00	113.00	59.00	F05	4	8.00	14.00	10.00	29.40	30.98	120.70	125.00
2.5	65	96.80	46.00	110.00	61.00	F05	4	8.00	14.00	10.00	30.00	48.741	139.70	145.00
3	80	116.80	46.00	128.00	73.00	F05	4	8.00	14.00	10.00	30.00	66.42	152.40	160.00
4	100	149.00	52.00	154.00	91.00	F07	4	9.00	16.00	11.00	31.40	90.64	190.50	180.00
5	125	168.90	56.00	169.00	105.00	F07	4	9.00	19.00	13.00	32.00	115.10	215.90	210.00
6	150	202.00	56.00	189.00	122.00	F07	4	9.00	19.00	13.00	30.00	140.23	241.30	240.00
8	200	250.00	60.00	214.00	146.00	F07/F10	4/4	9.00/11.00	22.00	16.00	30.00	189.53	298.50	295.00
10	250	308.00	68.00	251.00	185.00	F10	4	11.00	28.00	20.00	32.00	240.99	362.00	350.00
12	300	361.40	78.00	289.00	214.00	F10	4	11.00	30.00	22.00	32.00	289.68	431.80	400.00
14	350	413.00	78.00	340.00	262.00	F12	4	14.50	35.00	27.00	52.00	325.65	476.30	460.00
16	400	474.00	102.00	373.00	294.00	F12	4	14.50	35.00	27.00	52.00	374.88	539.80	515.00
18	450	528.00	114.00	407.00	319.00	F16	4	21.00	47.00	36.00	59.00	424.97	577.90	565.00
20	500	582.00	127.00	436.00	354.00	F16	4	21.00	49.00	36.00	59.00	473.25	635.00	620.00
22	550	634.00	127.00	464.00	381.00	F16	4	21.00	49.00	36.00	59.00	525.88	692.10	—
24	600	690.00	154.00	494.00	422.00	F16	4	21.00	59.00	46.00	80.00	571.61	749.30	725.00

Torque Rating(NM) for Rubber Line Wafer Butterfly Valve

VALVE		1.5"	2"	2.5"	3"	4"	5"	6"	8"	10"	12"	14"	16"	18"	20"	22"	24"
Full Rated Pressure Valve ΔP Bar (PSI)	3.5	7	7	13	14	29	44	58	102	164	269	351	418	659	768	996	1091
	7	8	8	14	18	30	47	65	118	183	317	401	504	825	957	1295	1412
	10	8	8	14	18	30	48	66	122	198	337	450	585	989	1144	1684	1760
	12	12	12	18	23	34	53	73	131	218	369	540	702	1186	1373	2189	2288
	16	17	17	22	32	45	65	110	210	319	468	800	1025	1730	2002	2845	3080



VTZ VALVES AND AUTOMATION

Registered Office: #24-3-10/6, Phase II, Dr. Deen Shaadikhana Complex, Old Post Office Junction, One Town, Port Area, Visakhapatnam-530001.

Website: www.vtzvalves.com ; Email: vtzvalves@hotmail.com (or) vtzvalves@gmail.com

Ph: +91-9000271257 / +91-9440087136